


GENERAL CHARACTERISTICS

Standard Bucket (SAE Heaped)	: 2.0 Cu.M	Parking Tyres	: SAHR on front wheels : 12.00x24 - 20 PR. OR 14.00x25 - 20 PR (On request)
Pay Load	: 4000 Kgs.	Steering	: Full power articulated with accumulator reserve.
Breakout Force	: 6700 Kgs. (Digging) 11890 Kgs. (Hyd. Combined)	Electric system	: 24V
Capacity (Tipping)	: 6640 Kgs.	Lights	: 3 Front and 3 Rear
Operating Weight	: 10600 Kgs.	Operating seat	: Cross seating, Bi-directional operation with maximum visibility and easy access to controls.
Standard Engine	: Deutz F6L 912W	Oscillation	: $\pm 8^\circ$ from horizontal
Power	: 62 KW 2300 rpm		
Torque Converter	: Clark C 272		
Transmission	: Clark, R 28362 3F & 3R speeds		
Axle	: Hamworthy 7500		
Brakes Service	: Straight hydraulic with accumulator reserve LCB, Disc self adjusting on all the four wheels, independent circuits for rear & front wheels powered by hydraulic system.		

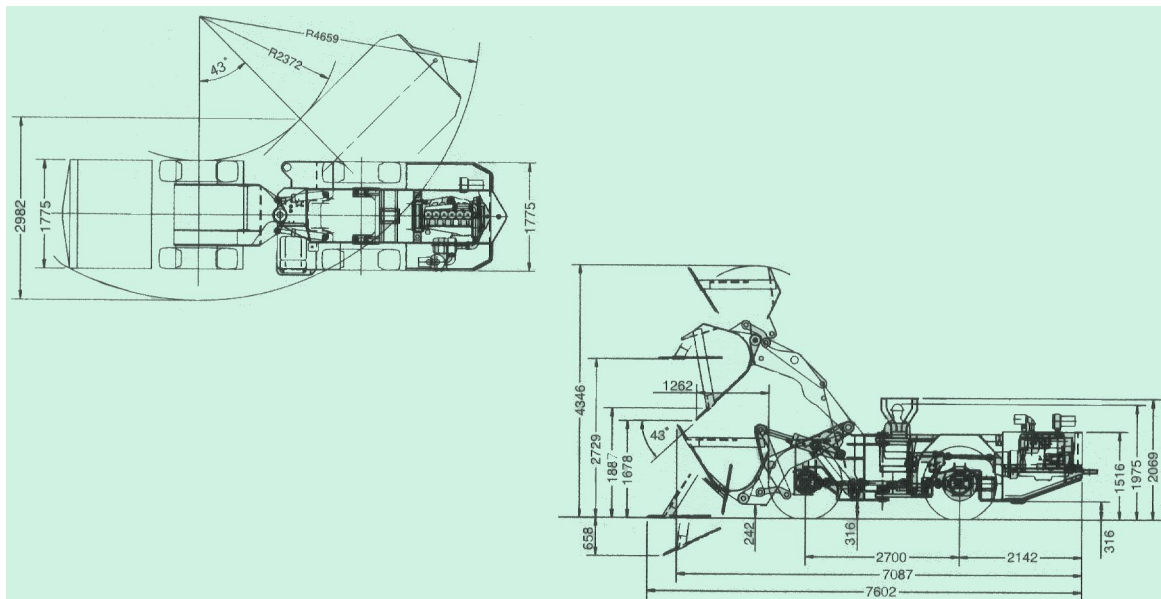

The manufacturer reserves the right to change the specification and / or design of this machine at any time without notice.

EIMCO ELECON (INDIA) LTD.
Regd. Office & Works

Anand Sojitra Road, Vallabh Vidyanagar 388 120, Gujarat.

Phone : 230502, 230602, 230902. Telex : 0172-232

